

FIG. 1 (PRIOR ART)

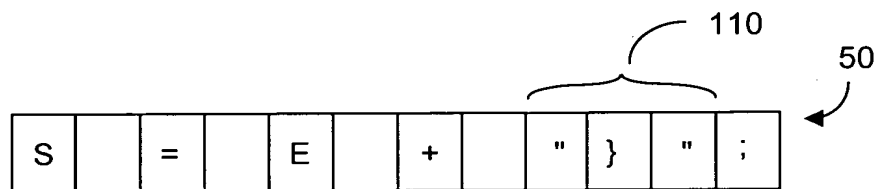


FIG. 2A (PRIOR ART)

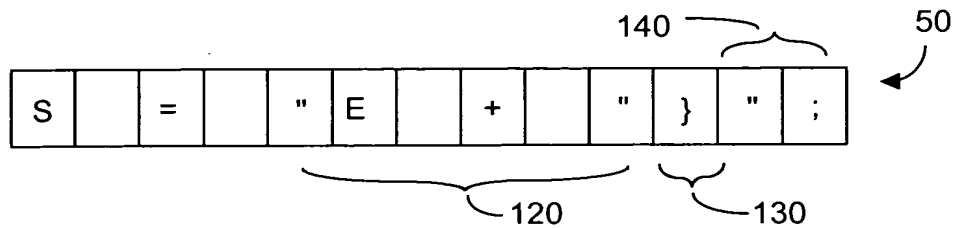


FIG. 2B (PRIOR ART)

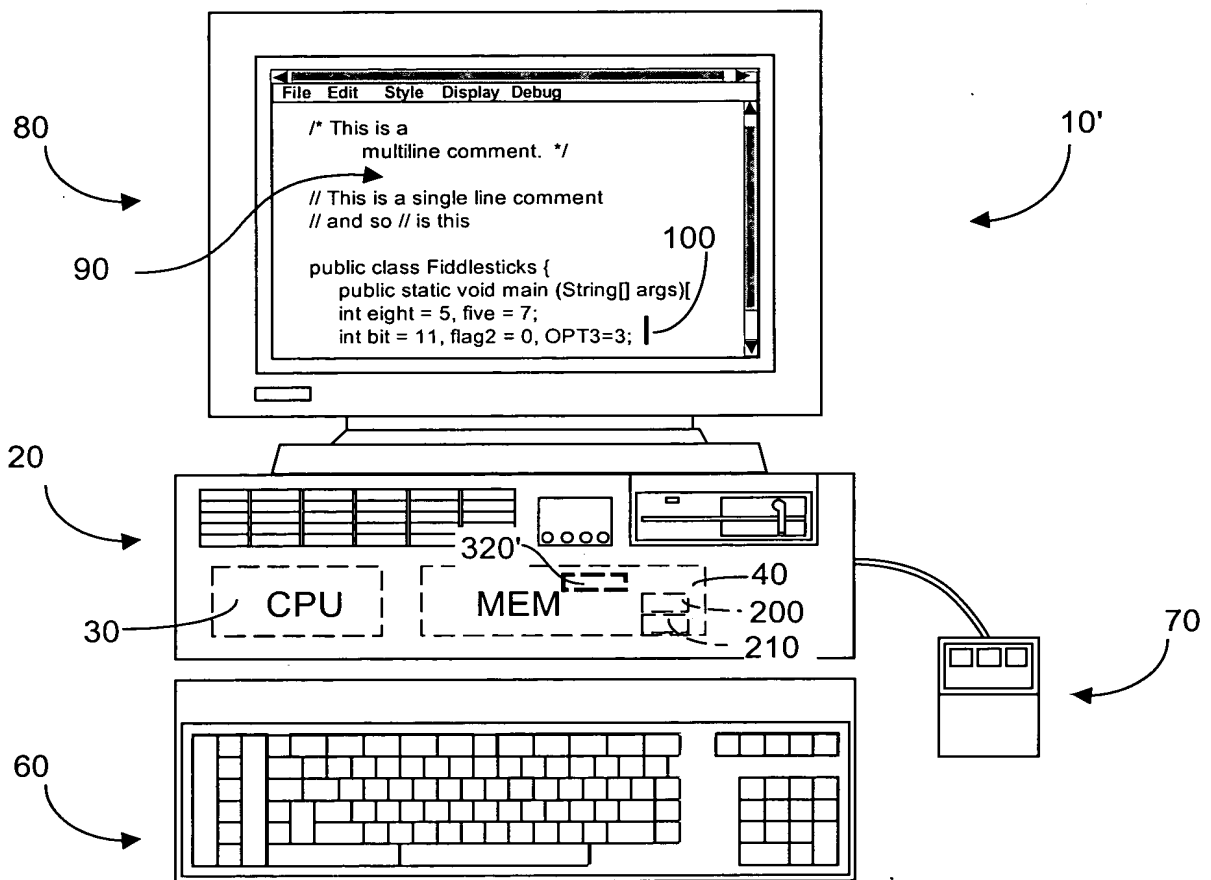


FIG. 3

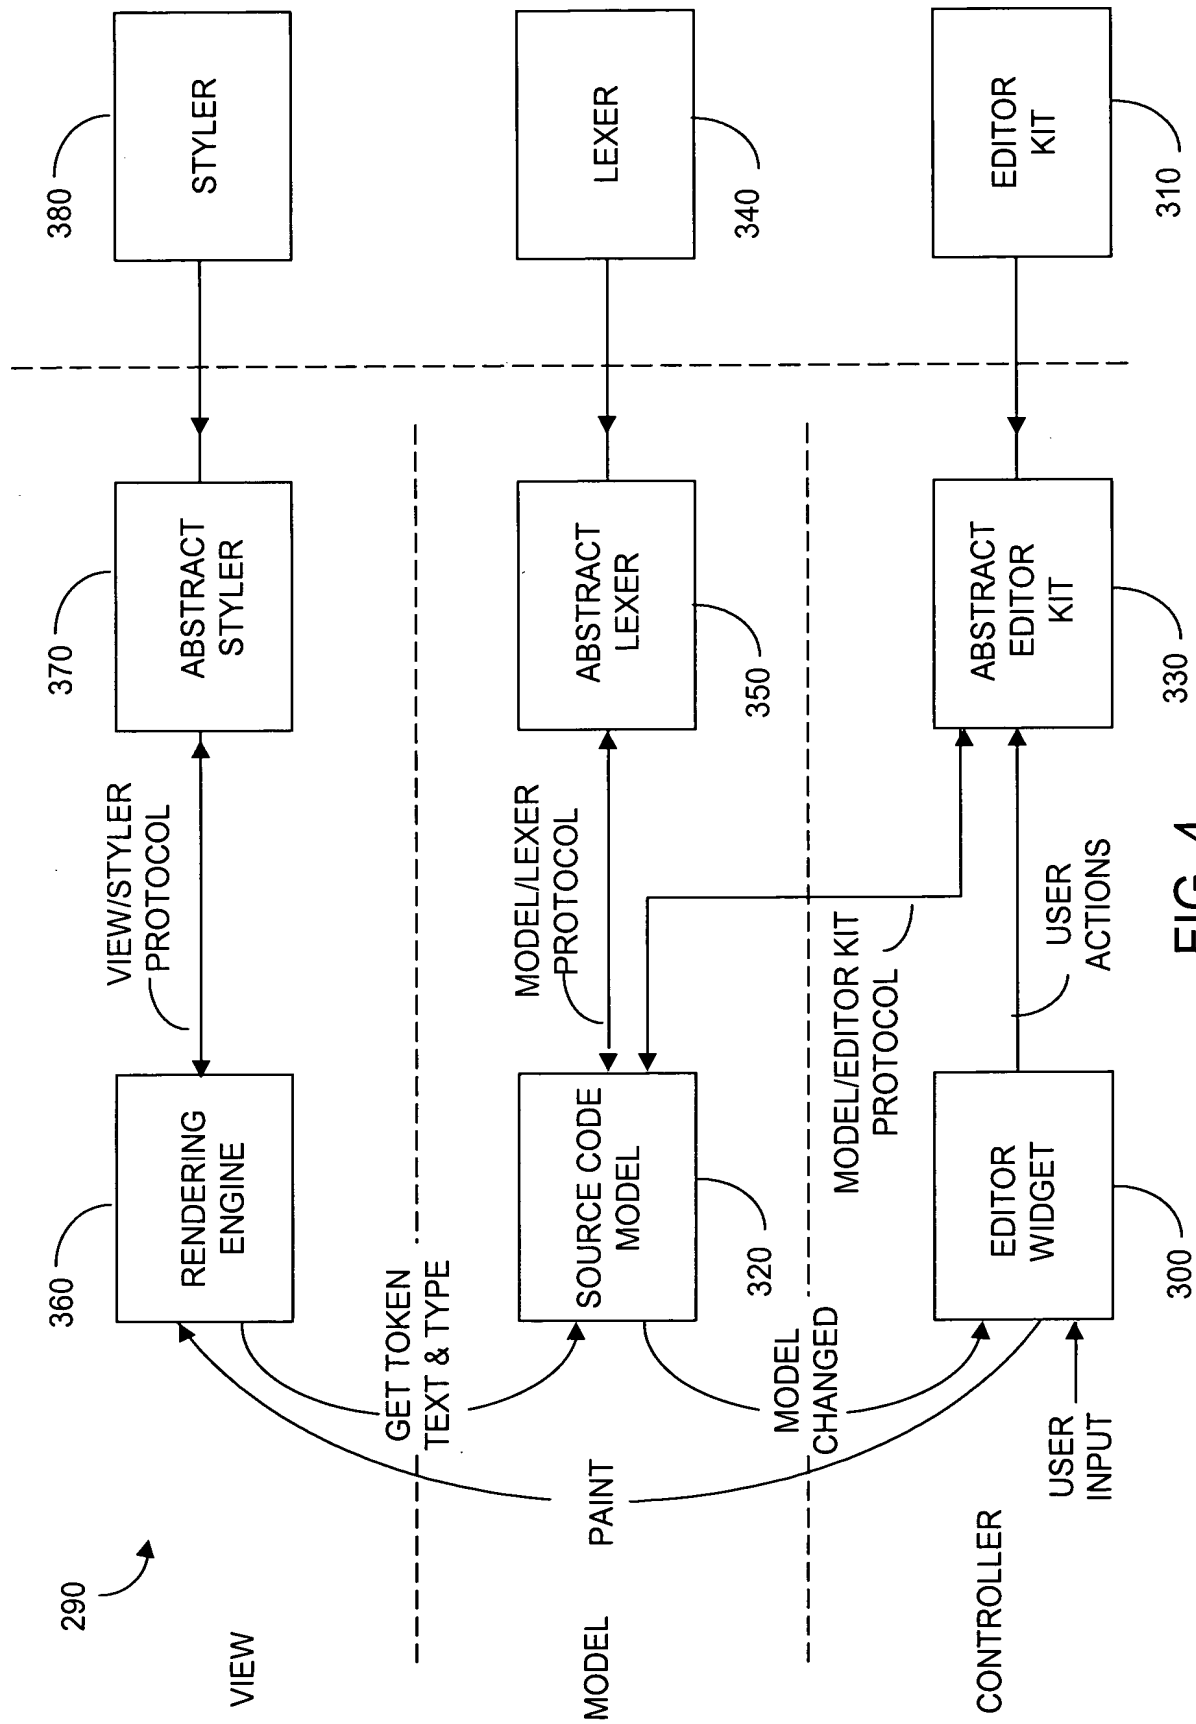


FIG. 4

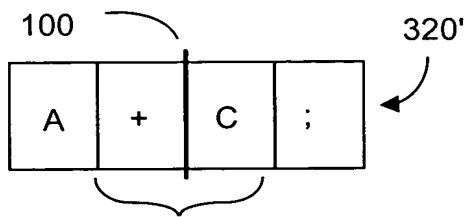


FIG. 5A




FIG. 5B

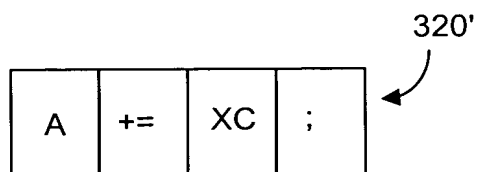


FIG. 5C

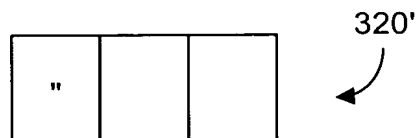


FIG. 5D

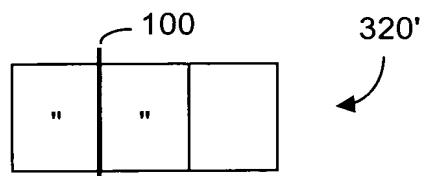


FIG. 5E


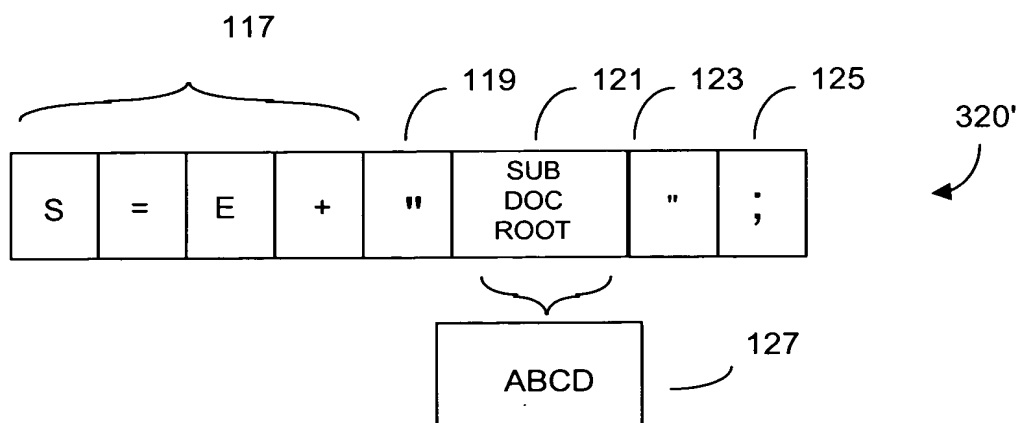


FIG. 5F

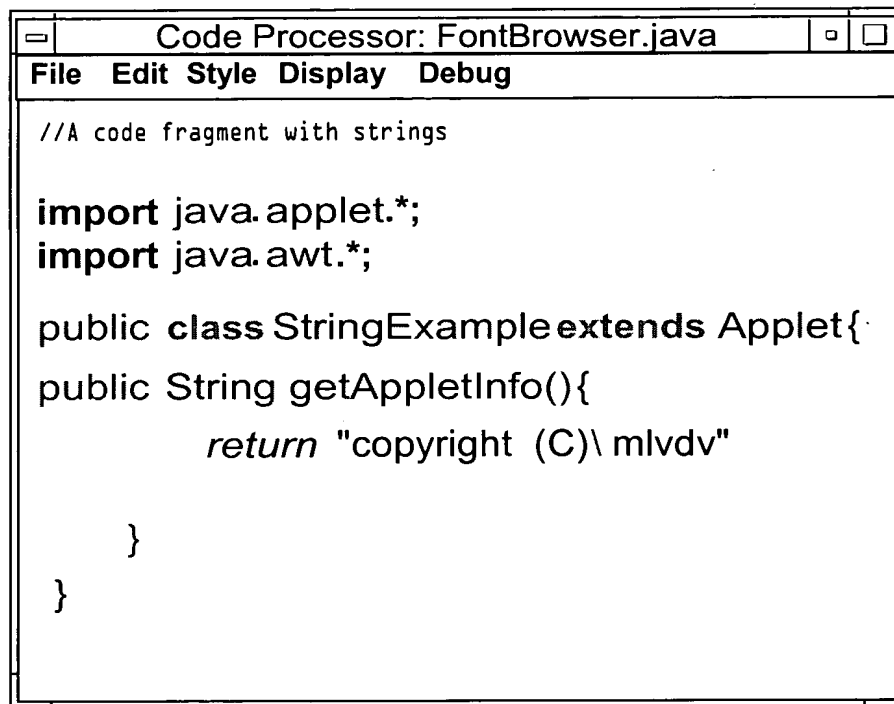

The image shows a screenshot of a code editor window. The title bar at the top reads "Code Processor: FontBrowser.java". Below the title bar is a menu bar with the following options: "File", "Edit", "Style", "Display", and "Debug". The main text area contains the following Java code:

```
//A code fragment with strings

import java.applet.*;
import java.awt.*;

public class StringExample extends Applet{
public String getAppletInfo(){
    return "copyright (C)\ mlv dv"

    }
}
```

FIG. 6